


Ladder Style Back-to-Back Pull Handle

- ◆ Back-to-back glass door mounted pull handle
- ◆ Gaskets to prevent contact between glass and metal
- ◆ Two mid-posts and fasteners for mounting back-to-back
- ◆ Custom lengths, designs, and finishes available on special order

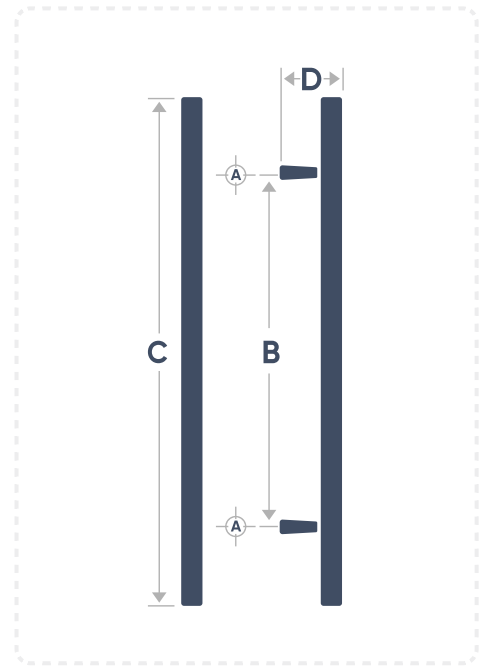

Glass Requirements 3/8" to 3/4" (10 to 19 mm) Thick Tempered Glass

Glass Fabrication Requires two 5/8" (16 mm) diameter holes

Finish



Brushed Stainless Steel



Polished Stainless Steel



Matte Black

Grade

304 Grade Stainless Steel

Length	B	C	D	Mounting Holes Center-to-Center (A)
24"	12" (305 mm)	24" (610 mm)	3" (76 mm)	12" (305 mm)
36"	24" (610 mm)	36" (914 mm)	3" (76 mm)	24" (610 mm)
48"	36" (914 mm)	48" (1219 mm)	3" (76 mm)	36" (914 mm)
60"	48" (1219 mm)	60" (1524 mm)	3" (76 mm)	48" (1219 mm)
72"	60" (1524 mm)	72" (1829 mm)	3" (76 mm)	60" (1524 mm)