


Locking Ladder Pull CGLLP59

- ◆ Back-to-back glass door mounted pull handle
- ◆ High security key lock on the outside, thumbturn on the inside
- ◆ Gaskets to prevent contact between glass and metal
- ◆ Two mid-posts and fasteners for mounting back-to-back



Rim cylinder
Small Format Core

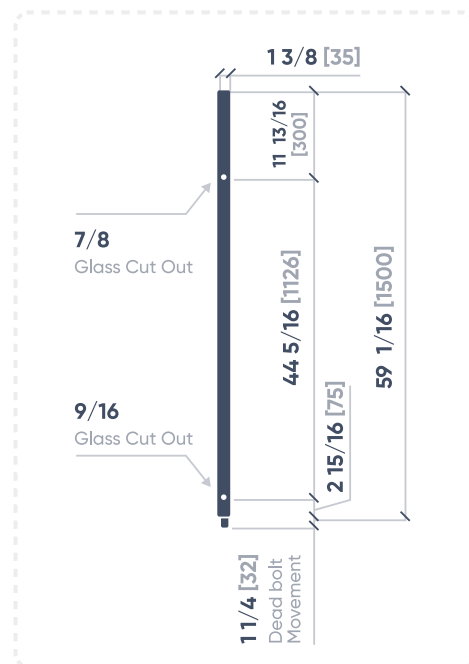

Thumbturn



Floor Locking

Glass Requirements

3/8" to 3/4" (10 to 19 mm) Thick Tempered Glass

Glass Fabrication

Requires 7/8" (22 mm) diameter hole for lock point; 9/16" (14 mm) diameter hole for bottom attachment point

Bottom Dead Bolt Movement

1-1/4" (32 mm)

Finish



Matte Black



Brushed
Stainless Steel

Grade

316 Grade Stainless Steel